



THE HEIGHT SAFETY SPECIALIST

FIBERGLASS WALKWAY




WHY USE FIBERGLASS WALKWAY?


- ✓ LIGHTWEIGHT
- ✓ NO CORROSION
- ✓ EASY TO INSTALL
- ✓ FIRE RETARDANT
- ✓ NO WELDING REQUIRED

TECHNICAL SPECIFICATIONS


Resin Base: Isophthalic Polyester (ISO)
 Industrial Grade Corrosion Resistance: Very Good
 Flame Spread Rating ASTM E84: Class 1, 30 or less
 Max Oper Temp: 221 degree F

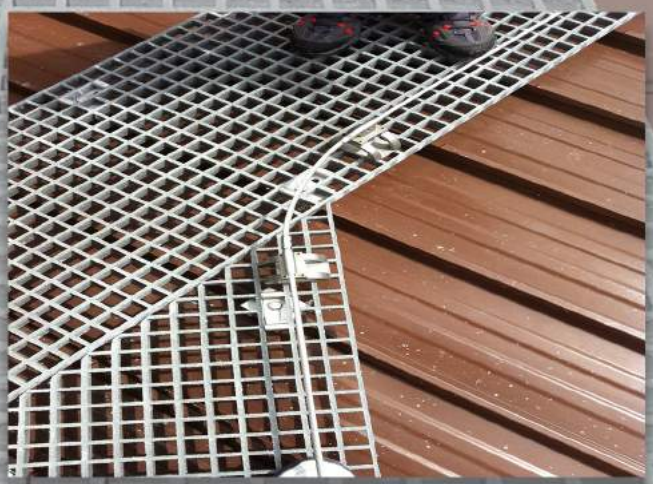



MAKE SAFETY YOUR PRIORITY

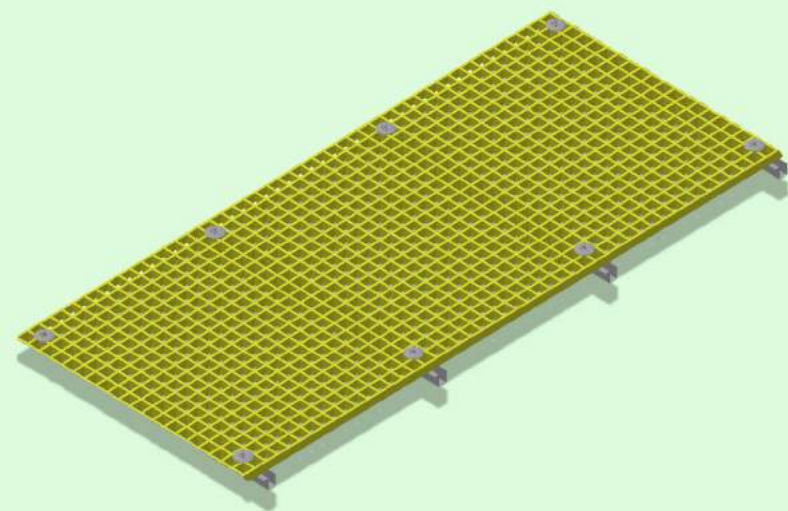

KLIP-LOK ROOF

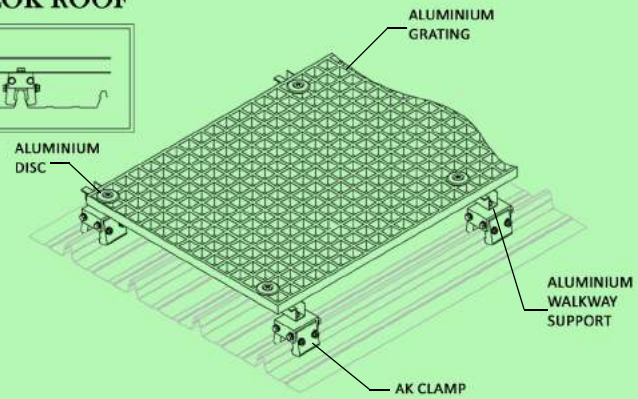

TRIMDEK ROOF

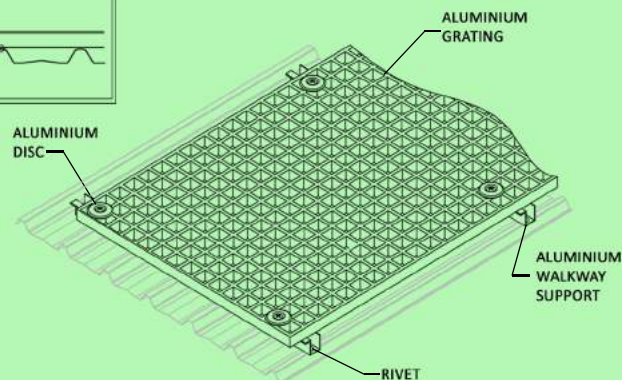

Span (mm)	Height (mm)	Mesh Size (mm)	kg/m ²					
			240	480	980	1450	2450	3650
450	25	38 x 38	0.66	1.092	1.93	2.769	4.47	6.579
600	25	38 x 38	1.118	2.108	4.14	6.172	10.211	15.865
750	25	38 x 38	2.667	5.387	10.82	16.28		
900	25	38 x 38	5.537	11.176	21.717			

UNIFORM LOAD DEFLECTION TABLE



AKROBAT PTE LTD

53 Ubi Avenue 1 #05-13 Paya Ubi Industrial Park Singapore 408934

Tel: +(65) 6744 4235 | Fax: +(65) 6333 8836 | Email: salesup@akrobat.com.sg

www.akrobat.com.sg

www.facebook.com/akrobat